

SPT Motorsports

Couplings
for fuel lines





The Stäubli technology dedicated to the performance...

Applications

Quick-release couplings for fuel lines:

- Filling
- Venting
- Sampling
- Safety break-away

Optimal flow

Valve design ensures optimal flow with a minimum outside diameter.

Compact and light weight

Compact size, light weight combined with high strength aluminium construction provide optimum performance.

All fluids compatibility

- all types of fuel
- ethanol
- oil.





...the Stäubli expertise to service your safety.

Safety break-away

Lanyard release feature ensures a safe fuel line break-away in a crash situation.

Non-spill

Flush-face design ensures no leakage when disconnecting.

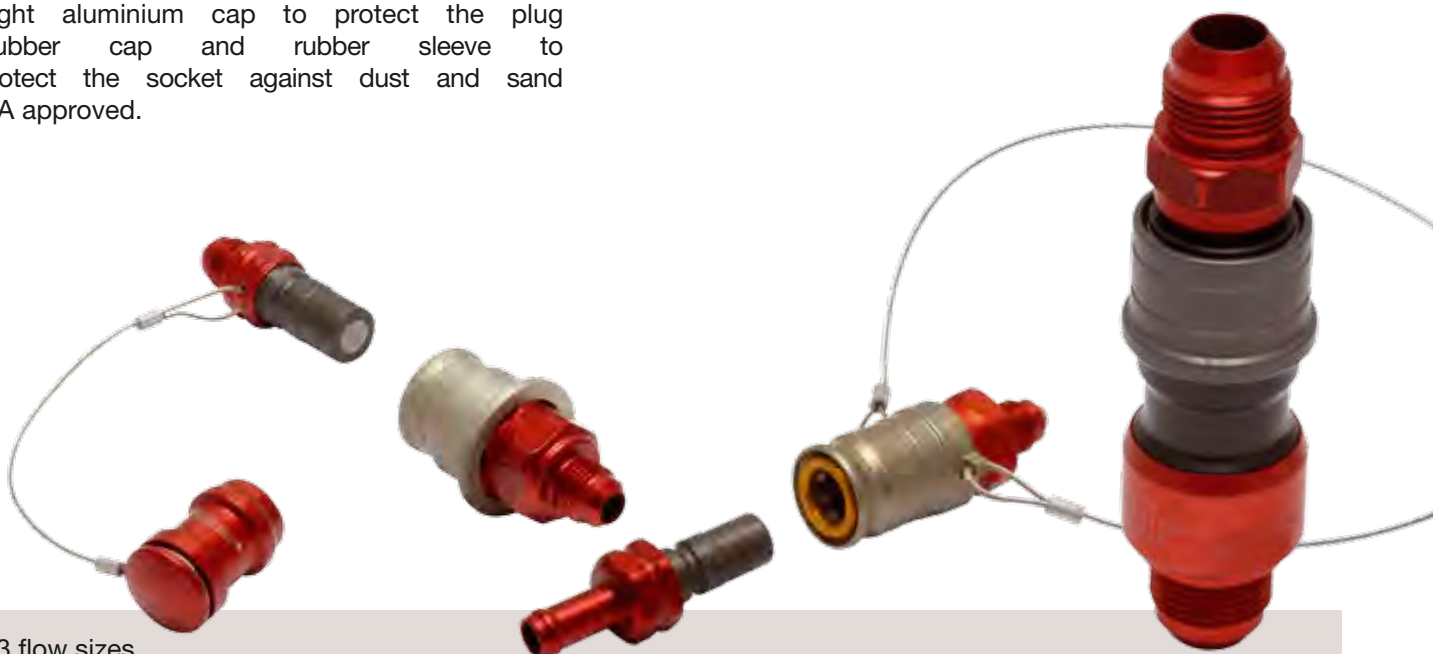
Rallye raid version (SPT 12)

Needed for gasoline refuelling in the particularly dusty conditions of the Rallye Raid :

- Tight aluminium cap to protect the plug
- Rubber cap and rubber sleeve to protect the socket against dust and sand
- FIA approved.



FIA approved



3 flow sizes




A complete range...

Technical characteristics

	SPT 05	SPT 08	SPT 12	SPT 12 RALLYE RAID
Nominal diameter (mm)	05	08	12	12
Max. working pressure* (bar)	40	20	20	20
Weight* socket + plug (g)	41	80	260	295
Cross section (mm ²)	19.6	50.2	113	113
Shut-off system	Double	Double	Double	Double
Option break-away (g)	■	■	-	-

*depends on references

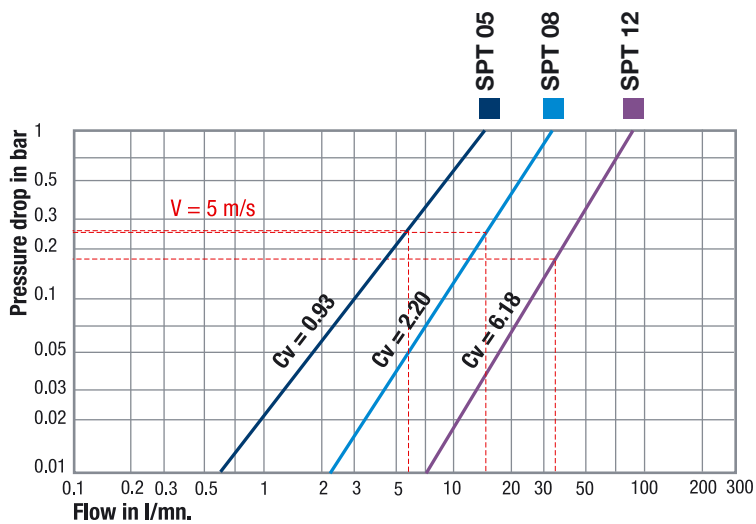Hydraulic charts flow rate / pressure drop



- **SPT 05**
socket : SPT05.1655/L/JV - plug : SPT05.7655/L/JV
- **SPT 08**
socket : SPT08.3656/L/JV - plug : SPT08.7656/L/JV
- **SPT 12 / SPT 12 RALLYE RAID**
socket : SPT12.1658/L/JV/PP/BC - plug : N01042803

Test conditions

- Hydraulic oil : INVAROL FJ13 (H515) at 40°C
- Viscosity : 13.4 cSt at 40°C
- Density : 833 kg/m³ at 40°C
- Flow direction : Plug Socket



...for all your needs











Construction
High strength aluminium

Seals:

- JKV version: Perfluoroelastomer in the fluid (other: Fluorosiliconelastomer).
- JV version: all Fluorocarbon.

Select your couplings

	Motorbike 	Car 
Safety break-away	SPT05	SPT08
Fuel connection	SPT05	SPT08
Fuel sampling	SPT05	SPT08
Refuelling		SPT12
Rallye raid version		SPT12


SPT 05	Threads F	L (mm)	JV	JKV
Male thread socket 	UNF 7/16 - 20" JIC DASH 04 UNF 9/16 - 18" JIC DASH 06	41.5 40.2	SPT 05.1653/L/JV SPT 05.1655/L/JV	SPT 05.1653/L/JKV SPT 05.1655/L/JKV
Male thread socket with safety break-away lanyard 	UNF 7/16 - 20" JIC DASH 04 UNF 9/16 - 18" JIC DASH 06	14 14	SPT 05.3653/L/JV SPT 05.3655/L/JV	SPT 05.3653/L/JKV SPT 05.3655/L/JKV
Socket for hose 	hose 08 (mm)	16.5	SPT 05.1808/L/JV/RG	SPT 05.1808/L/JKV/RG
Socket for hose with safety break away lanyard 	hose 08 (mm)	16.5	SPT 05.3808/L/JV/RG	SPT 05.3808/L/JKV/RG
Male thread plug* 	UNF 7/16 - 20" JIC DASH 04 UNF 9/16 - 18" JIC DASH 06	32.5 32	SPT 05.7653/L/JV SPT 05.7655/L/JV	SPT 05.7653/L/JKV SPT 05.7655/L/JKV
Plug for hose* 	hose 08 (mm)	16.5	SPT 05.7808/L/JV/RG	SPT 05.7808/L/JKV/RG
SPT 08	Threads F	L (mm)	JV	JKV
Male thread socket 	UNF 9/16 - 18" JIC DASH 06 UNF 3/4 - 16" JIC DASH 08	14 16.7	SPT 08.1655/L/JV SPT 08.1656/L/JV	SPT 08.1655/L/JKV SPT 08.1656/L/JKV
Male thread socket with safety break-away lanyard 	UNF 9/16 - 18" JIC DASH 06 UNF 3/4 - 16" JIC DASH 08	14 16.7	SPT 08.3655/L/JV SPT 08.3656/L/JV	SPT 08.3655/L/JKV SPT 08.3656/L/JKV
Male thread plug with rubber tight dust cap* 	UNF 9/16 - 18" JIC DASH 06 UNF 3/4 - 16" JIC DASH 08	14 16.7	SPT 08.7655/L/JV SPT 08.7656/L/JV	SPT 08.7655/L/JKV SPT 08.7656/L/JKV
Panel mounted plug 	UNF 9/16 - 18" JIC DASH 06 UNF 3/4 - 16" JIC DASH 08	27 30	SPT 08.5655/L/JV SPT 08.5656/L/JV	SPT 08.5655/L/JKV SPT 08.5656/L/JKV

*Plugs available with aluminium dust cap: add /BM at the end of the part number.


SPT 12		Threads F	L (mm)	JV	JKV
Male thread socket		UNF 7/8 - 14" JIC DASH 10	19	SPT 12.1657/L/JV	SPT 12.1657/L/JKV
		UNF 1 1/16 - 12" JIC DASH 12	21.9	SPT12.1658/L/JV	SPT 12.1658/L/JKV
Non threaded socket		-	-	N 009 161 98	N 010 830 07
Male thread plug		UNF 7/8 - 14" JIC DASH 10	19	SPT 12.7657/L/JV	SPT 12.7657/L/JKV
		UNF 1 1/16 - 12" JIC DASH 12	21.9	SPT 12.7658/L/JV	SPT 12.7658/L/JKV
Non threaded plug		-	-	N 009 162 98	N 010 831 07
Panel mounted plug		UNF 7/8 - 14" JIC DASH 10	36	SPT 12.5657/L/JV	SPT 12.5657/L/JKV
		UNF 1 1/16 - 12" JIC DASH 12	39	SPT 12.5658/L/JV	SPT 12.5658/L/JKV
SPT 12 rallye raid		Threads F	L (mm)	JV	JKV
Male thread socket		UNF 1 1/16 - 12" JIC DASH 12	-	SPT 12.1658/L/JV/PP/BC	SPT 12.1658/L/JKV/PP/BC
Male thread socket		UNF 1 1/16 - 12" JIC DASH 12	-	N 010 428 03	N 012 223 07

Plug assembly requirements for standard and rallye raid SPT 12

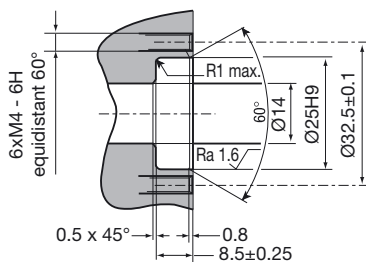Male thread plug



Center distance of plug axes

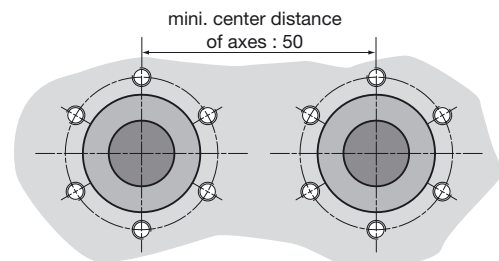

Brazil

Tel.: +55 (0) 11 5182 7600
connectors.br@staubli.com

North America

(USA, Canada, Mexico)
Tel.: +1 864/433-1980
connectors.usa@staubli.com

Belgium

Tel.: +32 (0) 56 36 40 03
connectors.be@staubli.com

**Czech Republic,
Slovakia, Hungary**

Tel.: +420 466 616 125
connectors.cz@staubli.com

France

Tel.: +33 (0)1 69 93 25 00
srf@staubli.com

Germany, Austria

Tel.: +49 (0) 921/883-80
connectors.de@staubli.com

Italy

Tel.: +39 (0) 362/944.1
connectors.it@staubli.com

Poland

Tel.: +48 42 636 85 04
connectors.pl@staubli.com

Portugal

Tel.: +351 22 978 39 56/50
connectors.pt@staubli.com

Russia

Tel.: + 7 812 3344630
connectors.ru@staubli.com

Spain

Tel.: +34 937 205 405
connectors.es@staubli.com

Switzerland

Tel.: +41 (0) 43/244 22 33
connectors.ch@staubli.com

United Kingdom

Tel.: +44 (0) 1952 671 918
connectors.uk@staubli.com

China

Tel.: +86 571 86912161
connectors.cn@staubli.com

Hong Kong

Tel.: +852-2366 0660
connectors.hk@staubli.com

Japan

Tel.: +81 6 6889 3308
connectors.stkk@staubli.com

Singapore

Tel.: +65 / 6266 0900
connectors.sg@staubli.com

Taiwan

Tel.: +886-2-2568 2744
connectors.tw@staubli.com

Turkey

Tel.: +90 212/472 13 00
connectors.tr@staubli.com

www.staubli.com



■ Staubli units
○ Connectors distributors

International sales coordination

Stäubli Faverges - BP 70 - F - 74210 Faverges
Tel.: +33 (0) 4 50 65 67 97 - Fax: +33 (0) 4 50 65 60 69
e mail: connectors.sales@staubli.com

Stäubli is a trademark of Stäubli International AG, registered in Switzerland and other countries.

© Stäubli, 27/07/2010

Z 413.01 e C

printed on PEFC paper